


**Universelle Chemie-Dichtung
Kegelfeder rotierend
Massive, gelötete oder
eingeschrumpfte Gleitringe**

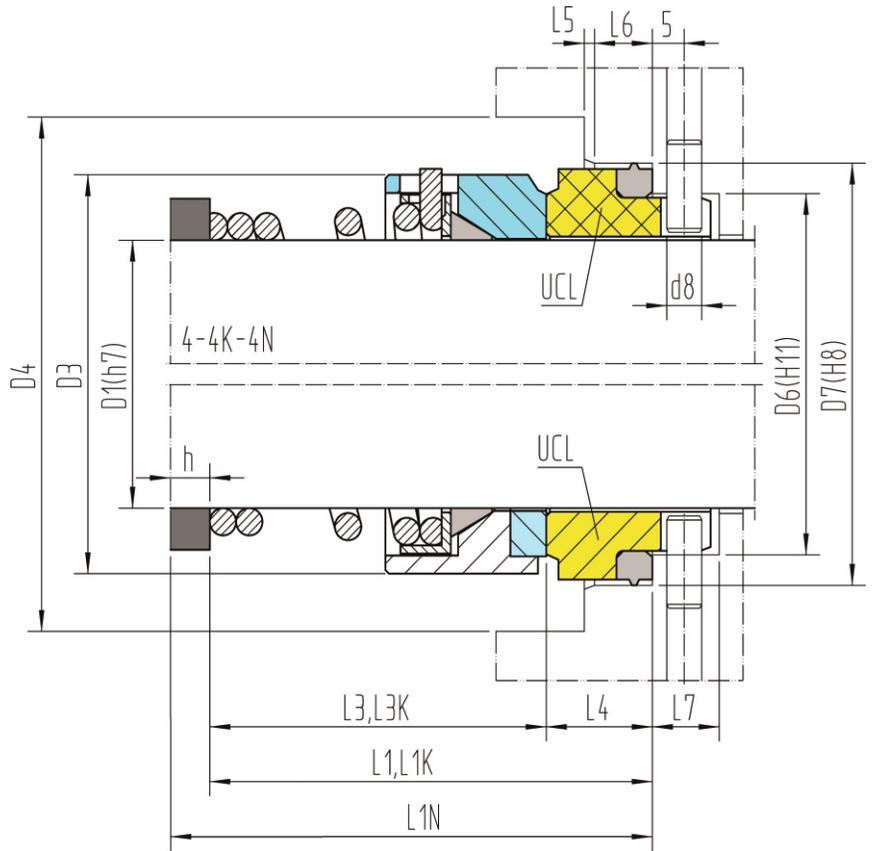

Einsatzgrenzen:
(siehe Betriebsbedingungen Seite 112)

4-4K-4N	
p ≤	12 bar (16 bar)
t =	-35 ÷ 140°C (180°C)
v ≤	15 m/s

Werkstoffe:
Rotierend: B, G, Q, U, M
Stationär: B, Q, U
Nebendichtungen: T

L1=L3+L4
L1K=L3K+L4
L1N=L3+H+L4

EN 12756 (DIN 24960)

													UCC	UCL	
D1	D6	D7	D3	D4	L1K	L3K	L1N	L1	L3	L4	L6	L5	H	D8	L7
10	17	21	21	22	32.5	25.5	40	22	15	7	4	1.5	18	3	8.5
12	19	23	22	24	32.5	25.5	40	25	18	7	4	1.5	15	3	8.5
14	21	25	24	26	35	28	40	29	22	7	4	1.5	11	3	8.5
16	23	27	26	28	35	28	40	30	23	7	4	1.5	10	3	8.5
18	27	33	29	34	37.5	27.5	45	34	24	10	5	2	11	3	9
20	29	35	30	36	37.5	27.5	45	35	25	10	5	2	10	3	9
22	31	37	34	38	37.5	27.5	45	35	25	10	5	2	10	3	9
24	33	39	35	40	40	30	50	37	27	10	5	2	13	3	9
25	34	40	37	41	40	30	50	37	27	10	5	2	13	3	9
28	37	43	42	44	42.5	32.5	50	39	29	10	5	2	11	3	9
30	39	45	45	48+	42.5	32.5	50	40	30	10	5	2	10	3	9
32	42	48	45	48	42.5	32.5	55	40	30	10	5	2	15	3	9
33	42	48	48	54+	42.5	32.5	55	49	39	10	5	2	6	3	9
35	44	50	50	54+	42.5	32.5	55	49	39	10	5	2	6	3	9
38	49	56	54	58	45	32	55	55	42	13	6	2	—	4	9
40	51	58	56	60	45	32	55	55	42	13	6	2	—	4	9
43	54	61	60	63	45	32	60	60	47	13	6	2	—	4	9
45	56	63	64	65	45	32	60	60	47	13	6	2	—	4	9
48	59	66	67	73+	45	32	60	60	47	13	6	2	—	4	9
50	62	70	69	75+	47.5	33.5	60	60	46	14	6	2.5	—	4	9
53	65	73	74	73	47.5	33.5	70	70	56	14	6	2.5	—	4	9
55	67	75	74	80+	47.5	33.5	70	70	56	14	6	2.5	—	4	9
58	70	78	80	83	52.5	38.5	70	70	56	14	6	2.5	—	4	9
60	72	80	80	85	52.5	38.5	70	70	56	14	6	2.5	—	4	9
63	75	83	87	88	52.5	38.5	70	70	56	14	6	2.5	—	4	9
65	77	85	87	90	52.5	38.5	80	80	66	14	6	2.5	—	4	9
68	81	90	92	93	52.5	36.5	80	80	64	16	7	2.5	—	4	9
70	83	92	92	95	60	44	80	80	64	16	7	2.5	—	4	9
75	88	97	97	104	60	44	80	80	64	16	7	2.5	—	4	9
80	95	105	102	109	60	42	90	90	72	18	7	3	—	4	9
85	100	110	110	114	60	42	90	90	72	18	7	3	—	4	9
90	105	115	117	119	65	42	90	90	72	18	7	3	—	4	9
95	110	120	122	131+	65	42	90	90	72	18	7	3	—	4	9
100	115	125	127	137+	65	42	90	90	72	18	7	3	—	4	9

+Hier wird das Mindestmaß D4 überschritten.
Distanzring gehört nicht zum Lieferumfang der Gleitringdichtung.