

# BV25066 PN40 EN 1092-1

Stainless Steel CF8M (1.4408)

Temperature min. -60°C


Temperature max. +400°C

**BVALVE** EXPORT



Testing pressure in bar

Hydro	Body	60
	Seat	44
Air	Seat	07

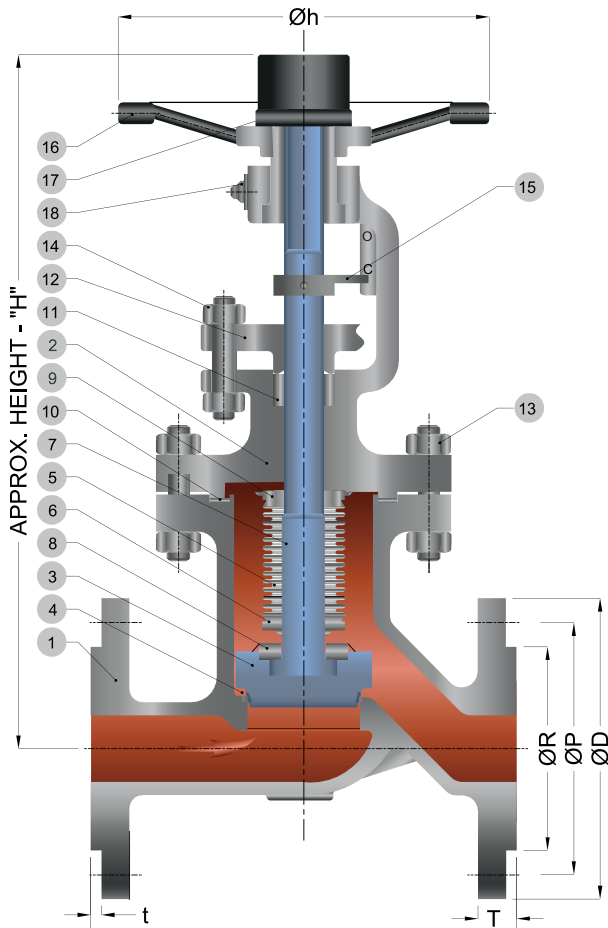

N°	COMPONENT	MATERIALS
1	Body	1.4408 / ASTM - A 351 Gr.CF8M
2	Bonnet	1.4408 / ASTM - A 351 Gr.CF8M
3	Plug	1.4408 / ASTM - A 351 Gr.CF8M + Stellite Gr.6
4	Integral seat	1.4408 / ASTM - A 351 Gr.CF8M + Stellite Gr.21
5	Bellow	1.4571 / AISI - 316Ti
6	Bellow collar	1.4401 / ASTM - A 276 TYPE 316
7	Stem	1.4401 / ASTM - A 276 TYPE 316
8	Collar ring	1.4401 / ASTM - A 276 TYPE 316
9	Top collar	1.4401 / ASTM - A 276 TYPE 316
10	Gasket	SPW - SS 316 + GRAPHITE
11	Packing	GRAPHITE
12	Gland bush /Flange	1.4408 / ASTM - A 351 Gr.CF8M
13	Fastener	ASTM - A193 Gr.B8M / A194 Gr.8M
14	Gland stud & nut	ASTM - A193 Gr.B8M / A194 Gr.8M
15	Guide plate/Indicator	1.4408 / ASTM - A 351 Gr.CF8M
16	Hand wheel	MILD STEEL / NODULAR CAST IRON
17	Hand wheel Nut/cap	1.4401 / AISI - 316
18	Grease nipple	1.4401 / AISI - 316

**ZERO LEAKAGE**

DIN: Rate A acc.EN12266-1

Face to face acc. to EN558-1

Flanges acc. to EN 1092-1 form B

DN	PN	ØD (outer flange diameter)	ØP (Bolt circle)	ØR	T (FGL.THK)	t	NO.OF HOLE / Ø	L (Face to face)	Øh	STROKE	H (closed)	Weight (Kg)
15	40	95	65	45	16	2	4/Ø14	130	150	4	260	8.5
20	40	105	75	58	18	2	4/Ø14	150	150	5	265	9.5
25	40	115	85	68	18	2	4/Ø14	160	150	6.5	280	11.5
32	40	140	100	78	18	2	4/Ø18	180	150	8	290	17.0
40	40	150	110	88	19	3	4/Ø18	200	200	10	318	19.0
50	40	165	125	102	20	3	4/Ø18	230	200	13	335	21.5
65	40	185	145	122	22	3	8/Ø18	290	250	16,5	415	33.5
80	40	200	160	138	24	3	8/Ø18	310	300	20	440	45.0
100	40	235	190	162	24	3	8/Ø22	350	300	25	515	61.5
125	40	270	220	188	26	3	8/Ø26	400	350	32	600	102.0
150	40	300	250	218	28	3	8/Ø26	480	400	38	655	122.0
200	40	375	320	285	34	3	12/Ø30	600	450	51	788	222.0
250	40	450	385	345	38	3	12/Ø33	730	500	64	930	362.0
300	40	515	450	410	42	4	16/Ø33	850	600	75	1.140	533.0

all dimensions in mm.

### WORKING CONDITIONS

Temperature °C	-60/-10	-10/150	150	200	250	300	350	400
Pressure Bar	40	40	36,3	33,7	31,8	29,7	28,5	27,4