


L4CSU-L4CLU

Kostengünstige Allround-Dichtung
Wellenschonend
Drehrichtungsunabhängig

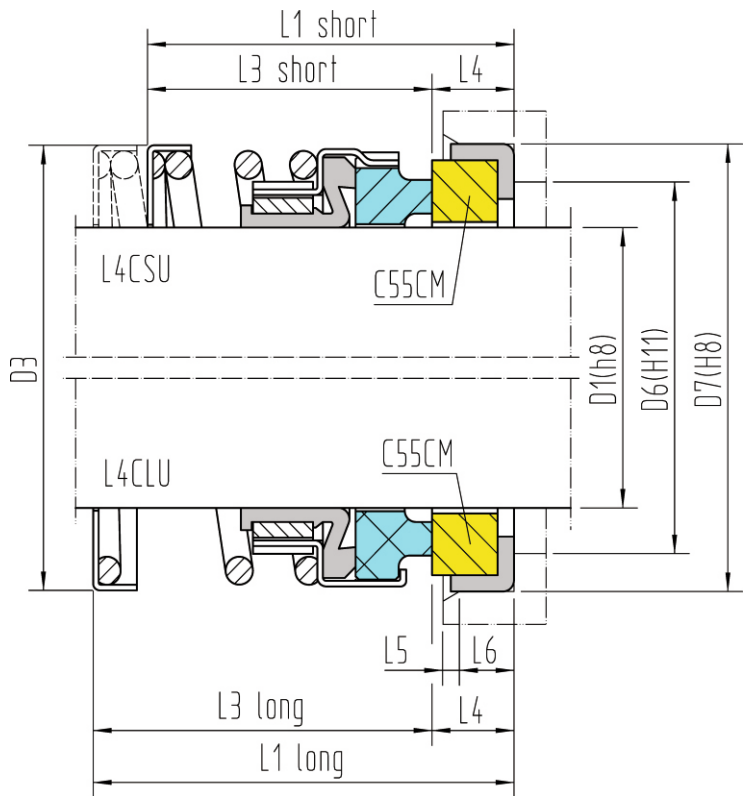

Einsatzgrenzen:
 (siehe Betriebsbedingungen Seite 112)

$p \leq$	12 bar
$t =$	$-20 \div 120^\circ\text{C}$
$v \leq$	10 m/s

Werkstoffe:
 Rotierend: A, B, Q, U
 Stationär: Q, U, V
 Nebendichtungen: P, E, V

US-Norm				C55CM						
D1 Zoll	D6	D7	D3	L1 short	L3 short	L1 long	L3 long	L4	L6	L5
0,375	0.625	0.875	0.875	1,125	0.812	1,500	1,187	0.313	0.250	0.050
0,500	0.750	1,000	0.875	1,125	0.812	1,500	1,187	0.313	0.250	0.050
0,625	0.937	1,250	1,000	1,281	0.875	1,718	1,312	0.406	0.344	0.050
0,750	1.062	1.375	1,062	1,281	0.875	1,718	1,312	0.406	0.344	0.050
0,875	1.187	1,500	1,250	1,343	0.937	1,781	1,375	0.406	0.344	0.050
1,000	1.312	1,625	1,343	1,437	1,000	2,000	1,563	0.437	0.375	0.050
1,125	1.437	1,750	1,343	1,500	1,063	2,062	1,625	0.437	0.375	0.050
1,250	1.563	1,875	1,562	1,500	1,063	2,062	1,625	0.437	0.375	0.050
1,375	1.687	2,000	1,562	1,562	1,125	2,124	1,687	0.437	0.375	0.050
1,500	1.813	2,125	1,718	1,562	1,125	2,124	1,687	0.437	0.375	0.050
1,625	2,000	2,375	1,813	1,875	1,375	2,500	2,000	0.500	0.437	0.050
1,750	2,125	2,500	1,813	1,875	1,375	2,500	2,000	0.500	0.437	0.050
1,875	2,250	2,625	1,875	2,000	1,500	2,625	2,125	0.500	0.437	0.050
2,000	2,375	2,750	2,000	2,000	1,500	2,625	2,125	0.500	0.437	0.050
2,125	2,375	3,000	2,125	2,249	1,687	2,937	2,375	0.562	0.500	0.050
2,250	2,437	3,125	2,244	2,249	2,249	2,937	2,375	0.562	0.500	0.050
2,375	2,563	3,250	2,382	2,375	1,813	3,062	2,500	0.562	0.500	0.050
2,500	2,687	3,375	2,500	2,375	1,813	3,062	2,500	0.562	0.500	0.050
2,625	2,812	3,375	2,598	2,562	1,937	3,375	2,750	0.625	0.562	0.100
2,750	2,937	3,500	2,750	2,562	1,937	3,375	2,750	0.625	0.562	0.100
2,875	3,062	3,750	2,795	2,687	2,062	3,500	2,875	0.625	0.562	0.100
3,000	3,187	3,875	2,875	2,687	2,062	3,500	2,875	0.625	0.562	0.100
3,125	3,312	4,000	3,125	2,968	2,187	3,906	3,125	0.781	0.656	0.100
3,250	3,437	4,125	3,250	2,968	2,187	3,906	3,125	0.781	0.656	0.100
3,375	3,562	4,250	3,307	2,968	2,187	3,906	3,125	0.781	0.656	0.100
3,500	3,687	4,375	3,500	2,968	2,187	3,906	3,125	0.781	0.656	0.100
3,625	3,812	4,500	3,562	3,093	2,312	4,031	3,250	0.781	0.656	0.100
3,750	3,937	4,625	3,562	3,093	2,312	4,031	3,250	0.781	0.656	0.100
3,875	4,062	4,750	4,000	3,218	2,437	4,156	3,375	0.781	0.656	0.100
4,000	4,187	4,875	4,187	3,218	2,437	4,156	3,375	0.781	0.656	0.100