


Sehr einfache Großseriendichtung
Kurze Einbaulänge
Niederdruckbereich
Drehrichtungsunabhängig

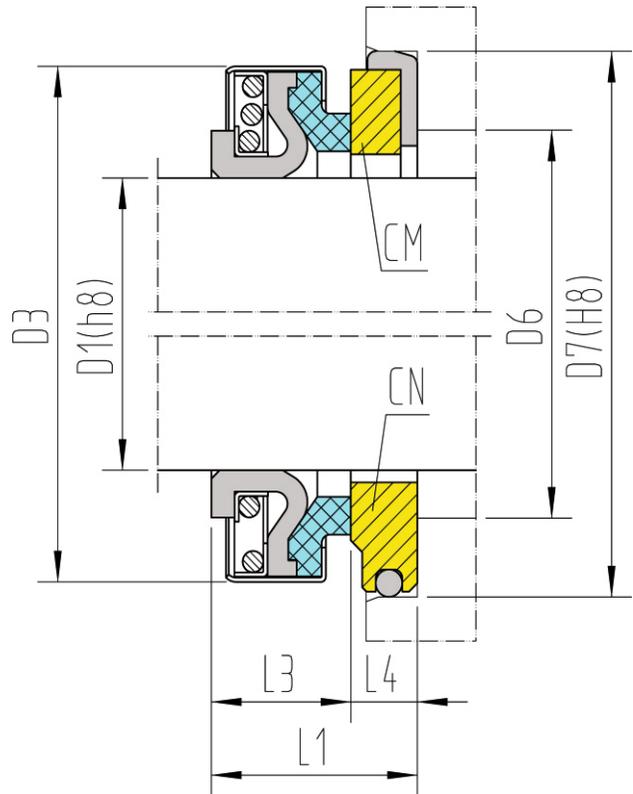

Werkstoffe:
 Rotierend: A, B, Q, U
 Stationär: H, Q, U, V
 Nebendichtungen: P, E, V

Einsatzgrenzen:
 (siehe Betriebsbedingungen Seite 110)

p ≤	5 bar
t =	-20 ÷ 100°C
v ≤	10 m/s

Spezielle Einbauräume							CM	CN
D1	D3	D6	D7	L1	L3	L4		
6	18	8	22	12	8	4		
8	20/24	10	22/26	16.5	11	5.5		
10	24	12	26	19	11	8		
11	24	13	26	19	11	8		
12	24	14	26	19/16,5	11	8/5,5		
12	24	14	26	21/18,5	13	8/5,5		
13	24	15	26	21	13	8		
14	32	16	29,5/38	21	13	8		
15	32/35	17	29,5/38	21	13	8		
16	32/35	18	29,5/38	21	13	8		
17	39	19	42	21	13	8		
18	39	20	42	21	13	8		
19	39	21	42	21	13	8		
20	39/42	22	42/45	21/23	13	8/10		
22	42	24	45	23	13	10		
23	47	25	50	24	14	10		
24	47	26	50	24	14	10		
25	42/47	27	50	24	14	10		
28	54	31	57	25	15	10		
30	54	33	57	25	15	10		
32	54	35	57	25	15	10		
35	60	38	63	26	16	10		
38	65	41	68	29	18	12		
40	65	43	68	29	18	12		
45	70	48	73	32	20	12		
50	85	53	88	38/39.5	23/24.5	15		
55	85	53	88	39	24	15		
60	105	65	110	45	30	15		
65	105	70	110	45	30	15		
70	105	75	110	47	32	15		